DSCP81

Configurable Voltage/Current Input Signal Conditioner, DIN Mount

Description

Each isolated DSCP81 signal conditioner is designed for measuring voltages up to ±1000VDC and currents up to ±100mA. The input type, measurement range, and other features are software configurable. A PC with RS-232C serial port, the DSCX-787 and DSCX-587 interface cables, and the DSCX-557 configuration software are required to program the DSCP81.

The DSCP81 can interface to either a current or voltage input and provide a current or voltage output. The input filter characteristics, input and output ranges, input signal linearization, signal inversion, and optional alarm relay output are all software configurable by the user. The input signal may be linearized using up to 50 points of interpolation. Optionally, the user may specify all configurable parameters and request factory configuration.

Two models are available offering wide-range power supply connection: 24 to 60VDC/AC, and 85 to 230VDC/AC. The DSCX-557 configuration software allows query, print-out and saving of configuration settings, display of input measurement value, and display of interpolation table points.

▶ Features

- Interfaces to Voltages up to ±1000VDC and Currents up to ±100mA
- Software Configurable Input Type and Range
- Software Configurable Filter
- 3700Vrms Transformer Isolation
- Supply Voltage of 24 to 60VDC/AC or 85 to 230VDC/AC
- Alarm Relay Output
- Mounts on Standard DIN Rail
- -25C to +55C Operating Temperature
- CE Compliant

There is impending danger of high voltage on any DSCP81 connections from high input voltage or high power supply voltage.

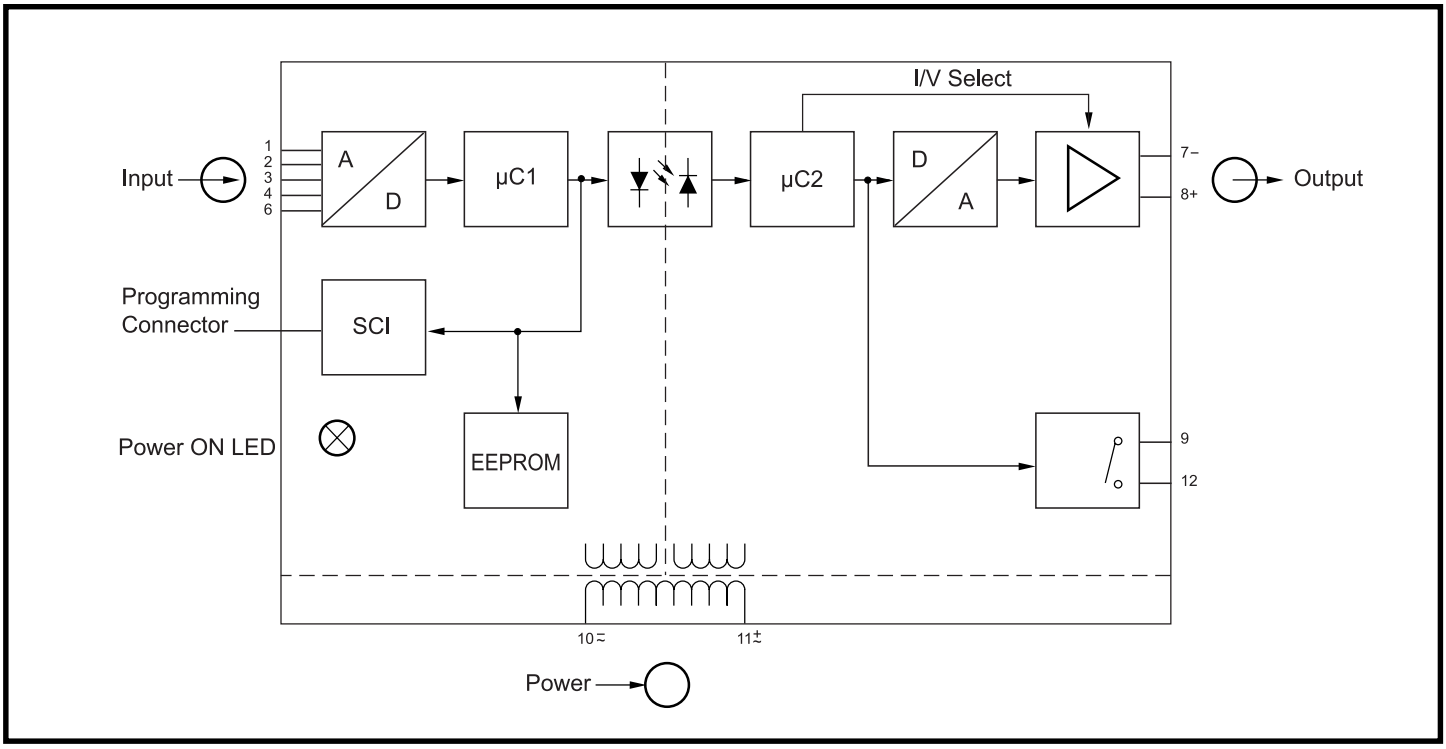


Figure 1: DSCP81 Block Diagram

SD1101 Rev B

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Specifications

Typical at T_A=+25°C and 24VDC or 230VAC ±10% supply voltage

Module	DSCP81
Input Range, Voltage	-1000VDC to +1000VDC max, Configurable
Input Resistance	1MΩ (V_{in}≤±1.7V), 540kΩ (V_{in}>±1.7V to ≤±100V), 5.5MΩ (V_{in}>±100V to ±1000V)
Input Range, Current	-100mA to +100mA max, Configurable
Input Resistance	1kΩ (I_{in}=-1.5mA to +1.5mA), 15.4Ω (I_{in}=-100mA to +100mA)
Output Range, Voltage	-10V to +10V max, Configurable
V Limit Under Overload	Approx. ±11V
Short Circuit Current	≤60mA
External Resistance	R_{ext}min (kΩ)≥V_{ev}/10mA Note: V_{ev}=Output Voltage End Value
Output Range, Current	-20mA to +20mA max, Configurable
Output Load Voltage	12V
Current Limit Under Overload	Approx. ±22mA
Open-Circuit Voltage	<16V
External Resistance	R_{ext}max (kΩ)=12V/I_{ev} Note: I_{ev} =Output Current End Value
Output Ripple (Voltage or Current)	<0.5% p-p
CMV, Input to Output & Relay	3700Vrms, 1 min.
CMV, Power Supply to Input & Output	3700Vrms, 1 min.
CMV, Power Supply to Relay	2300Vrms, 1 min.
CMV, Output to Relay	2300Vrms, 1 min.
Mains Ripple Suppression	Configurable to 50 or 60Hz
Input Filter	Configurable, see Table 1
Accuracy[1]	±0.1% Span Typ., ±0.2% Span max.
Output Stability	100ppm/°C
Linearization	Configurable; Linear, Custom, $x^{1/2}$, $x^{3/2}$, $x^{5/2}$
Alarm Relay	SPST Isolated Contact
Material	Gold Flashed Silver Alloy
Contact Rating	AC: ≤2A at 250V (500VA), DC:≤2A at 125V (60W)
Mode of Action	Configurable; Alarm and Power Loss (see Table 2 Feature 6)
Trip Point Type	Configurable; Inactive, Low, High (see Table 2 Feature 7)
Trip Point Setting	Configurable, –10 to 110% Input Span (see Table 2 Feature 7)
Trip Point Hysteresis	Configurable, 0 to 100% Input Span (see Table 2 Feature 7)
Energize/De-energize Delay	Configurable, 0.01 to 1000s (see Table 2 Feature 8)
Visible Alarm	Front Panel Green LED flashes "ON"
Power Supply	
Voltage	24 to 60VDC/AC, or 85 to 230VDC/AC; 45 to 400Hz AC
Tolerance	DC –15% to +33%, AC ±15%
Power Consumption	DC ≤1.2W, AC ≤2.5VA
Environmental	
Operating Temp. Range	-25°C to +55°C
Storage Temp. Range	-40°C to +70°C
Relative Humidity	0 to 75% Noncondensing
Emissions	EN50081-2 (Radiated, Conducted)
Immunity	EN50082-2 (ESD, RF, EFT)
Mechanical Dimensions (h)(w)(d)	2.72" x 0.69" x 4.49" (69.2mm x 17.5mm x 114mm)
Housing Material	Lexan 940, Flammability Class V-0 Acc. To UL 94
Mounting	DIN EN 50022-35x7.5 or –35x15

Ordering Information

Model	Input Range/Description	Output Range
DSCP81-01 (Standard Configuration[2])	User Configurable V or I Input, 24 to 60VDC/AC Power	User Configurable V or I Output
DSCP81-02 (Standard Configuration[2])	User Configurable V or I Input, 85 to 230VDC/AC Power	User Configurable V or I Output
DSCP81-01-xxxx (Contact Factory[3])	Factory Configured, 24 to 60VDC/AC Power	Factory Configured V or I Output
DSCP81-02-xxxx (Contact Factory[3])	Factory Configured, 85 to 230VDC/AC Power	Factory Configured V or I Output

Accessories

Model	Description
DSCX-787	PC Interface Cable
DSCX-587	Module Interface Cable
DSCX-557	Configuration Software

Table 1: Configurable Input Filter Settings

Response Time (63%) [s] 50Hz	Response Time (63%) [s] 60Hz	Response Time[4] (99%) [s] 50Hz	Response Time[4] (99%) [s] 60Hz
0.04	0.03	0.08	0.07
0.06	0.05	0.17	0.14
0.10	0.08	0.36	0.30
0.18	0.15	0.72	0.60
0.34	0.28	1.5	1.2
0.66	0.55	3.0	2.5
1.3	1.1	6.0	5.0
2.6	2.2	12	10
5.1	4.3	24	20
10.3	8.6	48	40
20.5	17	94	80
41	34	190	160
82	68	380	315
160	140	750	630
330	270	1500	1260

NOTES:
(1) Includes linearity and repeatability errors at reference conditions. Does not include CJC error.
(2) Shipped as 4 to 20mA input, 4 to 20mA output, linearization = linear, input filter = 80ms, ripple suppression = 60Hz, alarm function = inactive.
(3) Submit configuration form shown on page 190, and factory will assign part number prior to order entry.
(4) Configuration software allows selection of the (99%) values.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Figure 2: Switching Function by Trip Point Type

Alarm Relay Features[1]	
Trip point type:	Configurable as low or high or inactive
Trip point adjustment:	Configurable between –10 and 110%[2]
Hysteresis:	Configurable between >0 and 100%[2]
Energize/De-energize delays:	Configurable between 0 and 1000s
Relay contact position:	Configurable
Front panel display:	Green LED "ON" flashes when the limit value is exceeded.

NOTES:
(1) Refer to Table 2, Features 6, 7 and 8 for details
(2) In relation to the analog input span

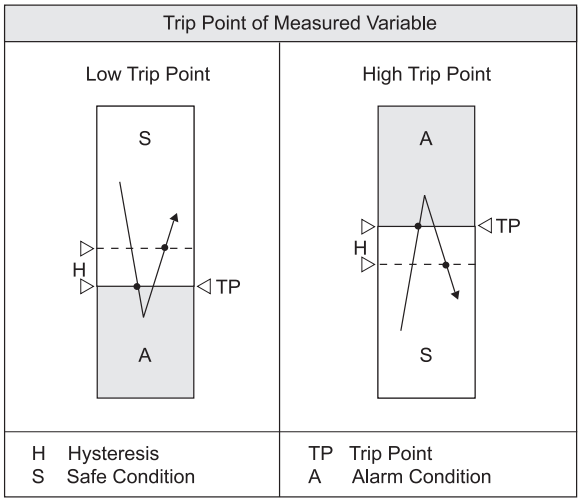


Table 3: Input Range and Associated Connection Diagram







Measuring Mode/Application	DC Voltage			DC Current
Measuring Range Limits	≤ ± 1.7V	> ± 1.7 to ≤ ± 100V	> ± 100 to ± 1000V	≤ ± 100 mA
= Input Signal				
= Output Signal K = Output Contact = Power Supply				

Figure 3: Configuring the DSCP81

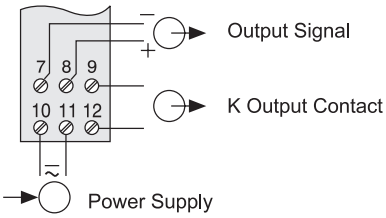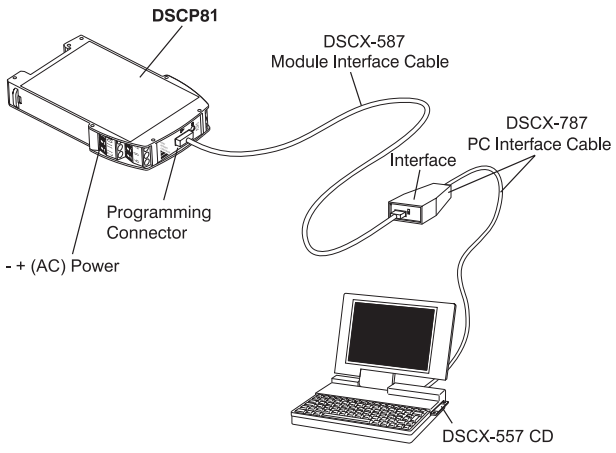

A PC, DSCX-787 PC interface cable, DSCX-587 module interface cable, and DSCX-557 configuration software are required to program the DSCP81. Power must be connected to the DSCP81 for configuration. The DSCX-557 configuration software is supplied on a CD and runs under Windows 95, 98, NT and 2000.

IMPORTANT!


1. DO NOT connect the DSCX-587 module interface cable to the DSCP81 programming connector when >253 V is applied to the DSCP81 input.


2. The DSCX-587 module interface cable must first be connected to the DSCX-787 cable before it is connected to the DSCP81.

3. The programming connector on the DSCP81 is DC connected to the DSCP81 input circuit. **DO NOT** touch any metal parts of the plug or socket if an input voltage >24 V is connected to the DSCP81.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

Figure 4: Product Dimensions

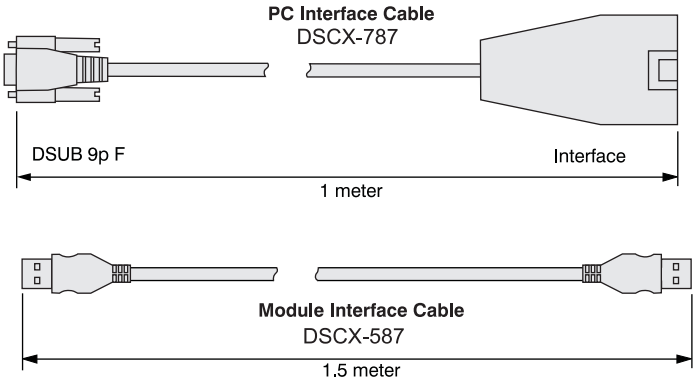

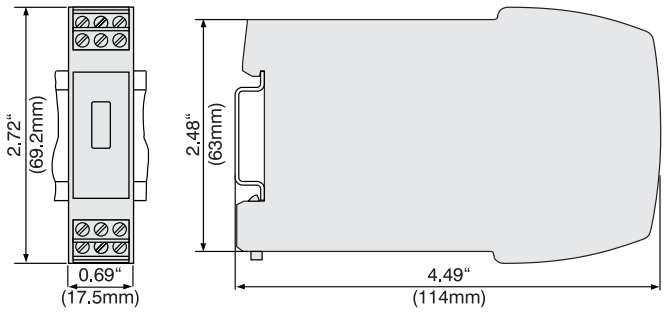

DSCP81 Clipped onto a Top-Hat Rail (35 x 15mm or 35 x 17 mm, acc. to EN 50 022).

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000