8B40/41

Voltage Input Modules, 1kHz Bandwidth

DESCRIPTION

8B40/41 modules are an optimal solution for monitoring real-world process signals and providing high-level signals to a data acquisition system. Each 8B40 or 8B41 module isolates, filters, and amplifies a voltage input signal and provides an analog voltage output (Figure below).

Signal filtering is accomplished with a 5-pole filter optimized for time and frequency response which provides 100dB per decade of normal-mode rejection above 1kHz. One pole of this filter is on the field side of the isolation barrier for anti-aliasing, and the other four are on the system side.

A special input circuit on the 8B40 and 8B41 modules provides protection against accidental connection of power-line voltages up to 240VAC. Clamp circuits on the I/O and power terminals protect against harmful transients.

Isolation is provided by transformer coupling to suppress transmission of common-mode spikes or surges. The module is powered from +5VDC, ±5%.

The modules are designed for installation in Class I, Division 2 hazardous locations and have a high level of immunity to environmental noise.

FEATURES


- Accepts Millivolt and Voltage Level Signals
- High-level Voltage Outputs
- 1500Vrms Isolation
- ANSI/IEEE C37.90.1 Transient Protection
- Input Protection to 240VAC Continuous
- 100dB CMR
- 1kHz Signal Bandwidth
- ±0.05% Accuracy
- ±0.02% Linearity
- Low Drift with Ambient Temperature
- UL/cUL Listed
- CE Compliant
- ATEX Compliance Pending
- Manufactured per RoHS III Directive 2015/863
- Mix and Match Module Types on Backpanel

BENEFITS

- Protects User Equipment from Lightning and Industrial Equipment Power-line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair

APPLICATIONS

- Designed for Embedded Applications
  - PC/104 Embedded Solutions
  - Compact PCI Systems
  - VMEbus Systems
  - PXI Systems
- Designed for Industrial Plant Environments
- High-vibration Environments

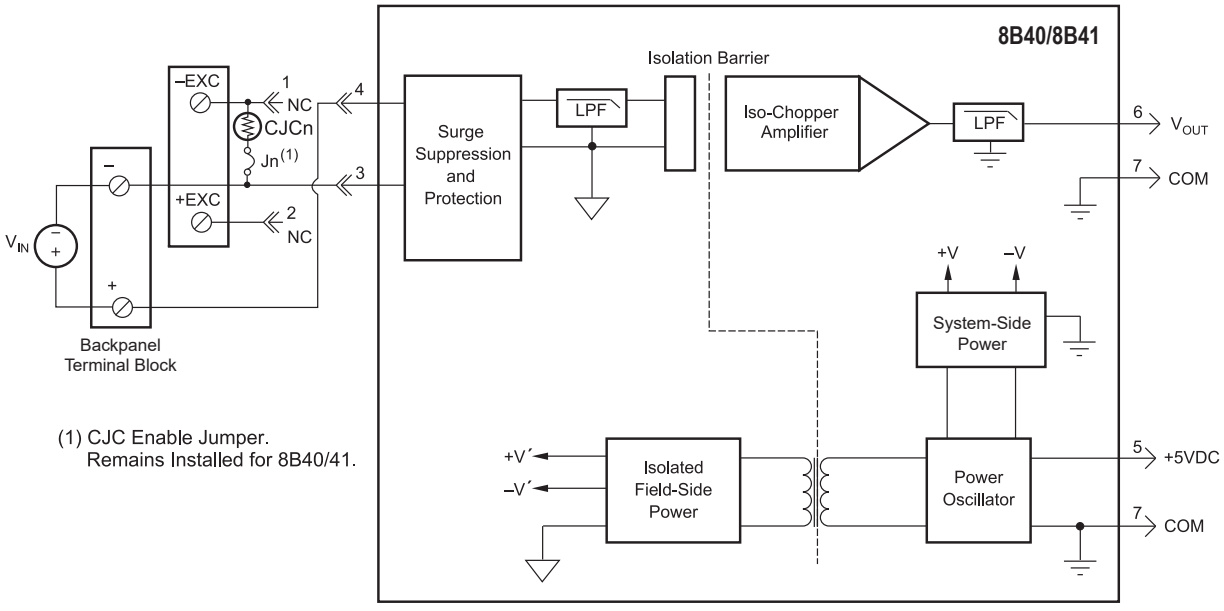

(1) CJC Enable Jumper.
Remains Installed for 8B40/41.

8B40/41 Block Diagram - For Module Dimensions and Pinouts, See Page 3-40

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

©1984-2024 Dataforth Corporation, All Rights Reserved ISO9001:2015-Registered QMS

Specifications

Typical* at T_A = +25°C and +5VDC Power

Module	8B40	8B41
Input Range	±10mV to ±100mV	±1V to ±60V
Input Bias Current	±0.5nA	±0.05nA
Input Resistance		
Normal	50MΩ	500kΩ (min)
Power Off	100kΩ	500kΩ (min)
Overload	100kΩ	500kΩ (min)
Input Protection		
Continuous(1)	240VAC	240VAC
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
CMV, Input to Output	1500Vrms (max)	1500Vrms (max)
Transient, Input to Output	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
CMR (50Hz or 60Hz)	100dB	100dB
NMR (-3dB at 1kHz)	100dB per Decade Above 1kHz	100dB per Decade Above 1kHz
Accuracy(2)	±0.05% Span	±0.05% Span
Linearity	±0.02% Span	±0.02% Span
Stability		
Offset	±10ppm/°C	±10ppm/°C
Gain	±50ppm/°C	±75ppm/°C
Noise		
Output, 100kHz	500µVrms	500µVrms
Bandwidth, –3dB	1kHz	1kHz
Response Time, 90% Span	550µs	550µs
Output Range	See Ordering Information	See Ordering Information
Output Protection	Continuous Short-to-Ground	Continuous Short-to-Ground
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
Power Supply Voltage	+5VDC ±5%	+5VDC ±5%
Power Supply Current	25mA	25mA
Power Supply Sensitivity	±75ppm/%	±75ppm/%
Mechanical Dimensions (h)x(w)x(d)	1.11" x 1.65" x 0.40" (28.1mm x 41.9mm x 10.2mm)	1.11" x 1.65" x 0.40" (28.1mm x 41.9mm x 10.2mm)
Environmental		
Operating Temp. Range	–40°C to +85°C	–40°C to +85°C
Storage Temp. Range	–40°C to +85°C	–40°C to +85°C
Relative Humidity	0 to 95% Noncondensing	0 to 95% Noncondensing
Emissions EN61000-6-4	ISM, Group 1	ISM, Group 1
Radiated, Conducted	Class A	Class A
Immunity EN61000-6-2	ISM, Group 1	ISM, Group 1
RF	Performance A ±0.5% Span Error	Performance A ±0.5% Span Error
ESD, EFT	Performance B	Performance B

NOTES:
*Contact factory or your local Dataforth sales office for maximum values.
(1) 240VAC between +Input terminal and –Input, +EXC, or –EXC terminals.
120VAC between –Input and +EXC or –EXC terminals.
120VAC between +EXC and –EXC terminals.
(2) Includes linearity, hysteresis, and repeatability.

Ordering Information

Model	Input Range	Output Range
8B40-01	–10mV to +10mV	–5V to +5V
8B40-02	–50mV to +50mV	–5V to +5V
8B40-03	–100mV to +100mV	–5V to +5V
8B40-04	–10mV to +10mV	0 to +5V
8B40-05	–50mV to +50mV	0 to +5V
8B40-06	–100mV to +100mV	0 to +5V
8B41-01	–1V to +1V	–5V to +5V
8B41-02	–5V to +5V	–5V to +5V
8B41-03	–10V to +10V	–5V to +5V
8B41-04	–1V to +1V	0V to +5V
8B41-05	–5V to +5V	0V to +5V
8B41-06	–10V to +10V	0V to +5V
8B41-07	–20V to +20V	–5V to +5V
8B41-08	–20V to +20V	0V to +5V
8B41-09	–40V to +40V	–5V to +5V
8B41-10	–40V to +40V	0V to +5V
8B41-12	–60V to +60V	–5V to +5V
8B41-13	–60V to +60V	0V to +5V

Installation Notes

1) This Equipment is Suitable for Use in Class I, Division 2, Groups A, B,C, D, or Non-hazardous Locations Only.
2) WARNING - Explosion Hazard - Substitution of Any Components May Impair Suitability for Class I, Division 2.
3) WARNING - Explosion Hazard - Do Not Disconnect Equipment Unless Power Has Been Switched Off or the Area is Known to be Non-hazardous.

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

©1984-2024 Dataforth Corporation, All Rights Reserved ISO9001:2015-Registered QMS