LDM80

RoHS III COMPLIANT 2015/863 CE

Signal-powered Fiber Optic Converters

DESCRIPTION

The LDM80 is a small, inexpensive fiber optic transmitter/receiver completely powered by the host RS-232 port. The enclosure for the LDM80 is a conductive shell which greatly reduces RF radiation and susceptibility. The rugged metal enclosure is small enough to mount on the back panel of typical computer equipment saving valuable desk and floor space. A pair of these units allows most RS-232C cable links to be replaced and extended with a duplex fiber optic cable. The normal 50-foot (15m) RS-232 limit may be extended to 2.2 miles (3.5 km). Fiber optic data communications provide complete EMI/RFI rejection, isolation, elimination of ground loops, and reduced error rates. Data security is enhanced by almost nonexistent electromagnetic emissions. The RS-232 connection is through male or female EIA 25-pin connectors. The fiber optic connection is through ST connectors.

The LDM80 is equivalent to a 3-wire, full-duplex, RS-232 circuit. Handshake signals are locally connected as in Figure 1. Indicating LEDs come on during a “SPACE” on transmit or receive data. A TD/RD reversing DIP switch is provided for connection to DTE (Data Terminal Equipment) or DCE (Data Communication Equipment) ports.

FEATURES


- Data Rates to 19.2kbps at 2.2 Miles (3.5km)
- 17dB Optical Link Power Budget
- Powered by RS-232 Host Port Signals
- Full-duplex Asynchronous Operation
- Indicating LEDs
- DCE/DTE Switch
- Designed for FCC Class A Requirements
- Complies with FCC Class A Requirements
- Pinned or Socketed RS-232 Connectors
- CE Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Extends Communication Distances
- Protects Sensitive Communication Ports
- Wide Power Supply Range

APPLICATIONS

- High-speed Data Communications
- Industrial Data Communication

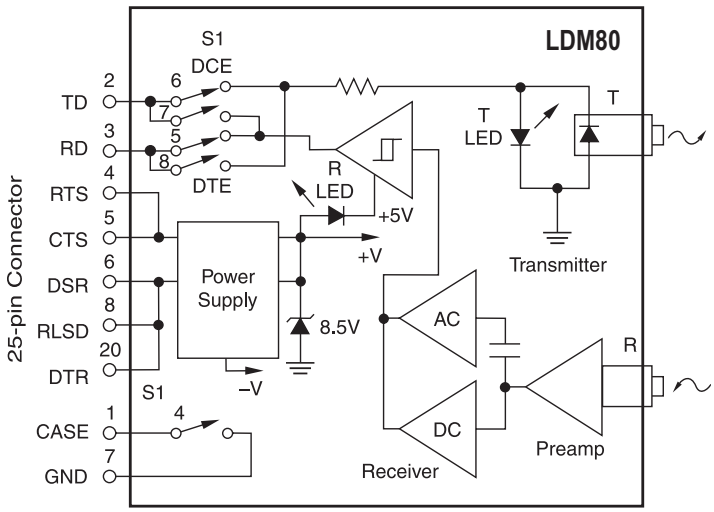

LDM80 Block Diagram

Pin Descriptions				Fiber Optic
Pin 1	CASE Ground			T / R
Pin 2	TD	[3]	Transmit Data	
Pin 3	RD	[2]	Receive Data	
Pin 4	RTS	[7]	Request To Send	
Pin 5	CTS	[8]	Clear To Send	
Pin 6	DSR	[6]	Data Set Ready	
Pin 7	SIG GND	[5]	Signal Ground	
Pin 8	RLSD	[1]	Receive Line Signal Detect	
Pin 20	DTR	[4]	Data Terminal Ready	

Pin Numbers Given are for the 25-pin Connector with the 9-pin Equivalent in [ ].

Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

©1984-2024 Dataforth Corporation, All Rights Reserved ISO9001:2015-Registered QMS

Specifications

Typical* at T_A = +25°C

Model	LDM80
Bit Rate (bps)	0-19.2k
Distance Over Bit Rate Range	
Fiber Core Diameter (µm)	Max Cable Length / Loss Budget (dB)
100.0 (glass)	2.2 mi (3.5) (km) / 17
50.0 (glass)	1.6 (2.6) / 9
62.5 (glass)	1.2 (1.9) / 11
85.0 (glass)	2.2 (3.5) / 16
200.0 (glass)	2.2 (3.5) / 23
1000.0 (plastic)	98 feet 30 (meters) / 32
Modes	Asynchronous 2-fiber Full-duplex, 1-fiber Simplex
Channel Lines(1)	TD, RD
Control Lines(1)	RTS, CTS, DTR, DSR, RLSD
Optical Transmitter	850 nm Wavelength
Output from 1m Cable	–26dB (typ) –27dB (min) –18dB (max)
Optical Receiver Power Input for 4µs Pulse Distortion	–44dB (min)
Optical Connectors	ST Compatible
RS-232 Output Voltage with 3kΩ Load	+5V Logic 0, –5V Logic 1
DCE/DTE Switch	1
Diagnostic LEDs	2
Power	
Port Power	+5.0 to +8.5VDC, No Current Limit, 5mA
and/or DC Operation	>+8.5 VDC, 10mA Current Limit
Environmental:	
Operating Temperature Range	–20°C to +70°C
Storage Temperature Range	–40°C to +85°C
Relative Humidity	0 to 95% Noncondensing
Dimensions (h)x(w)x(d)	3.57" x 2.1" x 0.74" (90.7mm x 53.3mm x 18.8mm)
Weight	4.2 oz (119g) (max)
MTTF(2)	>100,000 Hrs


NOTES:
*Contact factory or your local Dataforth sales office for maximum values.
(1) TD = Transmit Data, RD = Receive Data, RTS = Request To Send, CTS = Clear To Send, DTR = Data Terminal Ready, DSR = Data Set Ready, RLSD = Received Line Signal Detect.
(2) Ground-benign environmental conditions (no salt atmosphere, <50°C ambient temperature).

Ordering Information

Model	Description
LDM80-P-025*	Pinned RS-232 Connector, St-fiber Optic Connector

*Last Time Buy

WARNING! *Modern PC ports may not have enough power to power the LDM80 sufficiently for reliable data communications. The user may have to bring in external power through RTS (pin 4), CTS (pin 5), DSR (pin 6), RLSD (pin 8), or DTR (pin 20) and GND (pin 7). The power needs to be at least +5VDC at 5mA for the receive circuits. Also, the Transmit Data port line (pin 2) should be able to provide at least ±5VDC at 5mA minimum.*

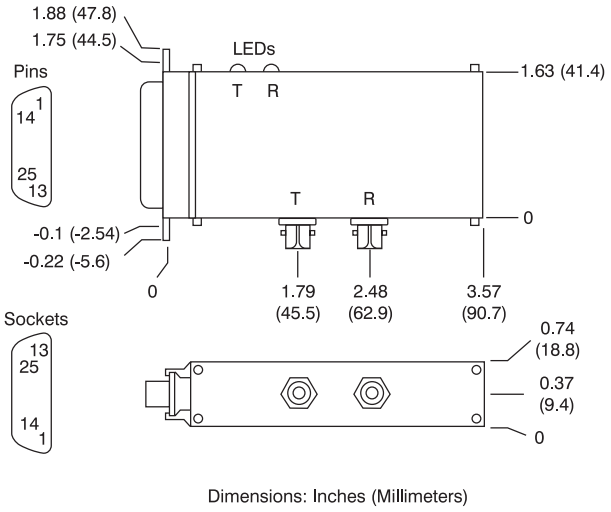

Dimensions: Inches (Millimeters)

LDM80 Dimensions

SECTION 8 - Data Comm

©1984-2024 Dataforth Corporation, All Rights Reserved ISO9001:2015-Registered QMS