SCM5B42

2-wire Transmitter Interface Modules

DESCRIPTION

Each SCM5B42 2-wire transmitter interface module provides a single channel which accepts a 4-20mA process current input and provides a standard +1 to +5V or +2 to +10V output signal (Figure below). An isolated +20VDC regulated power supply is provided to power the current transmitter. This allows a 2-wire loop-powered transmitter to be directly connected to the SCM5B42 without requiring an external power supply. The regulated supply will provide a nominal +20VDC at a loop current of 4-20mA.

The SCM5B42 will provide a 1500V isolation barrier for non-isolated 2-wire field transmitters. It can also be used when additional isolation is required between an isolated 2-wire transmitter and the input stage of the control room computer.

The voltage output is logic switch controlled, which allows these modules to share a common analog bus without the requirement of external multiplexers.

The SCM5B module family is designed with a completely isolated computer-side circuit which can be floated to ±50V from Power Common, pin 16. This complete isolation means that no connection is required between I/O Common and Power Common for proper operation of the output switch. If desired, the output switch can be turned on continuously by simply connecting pin 22, the Read-Enable pin, to I/O Common, pin 19.

A precision 20Ω current conversion resistor is supplied with the module. Sockets are provided on the SCMPB01/02/03/04/05/06/07 backpanels to allow installation of this resistor. Extra resistors are available under part number SCMXR1. All field inputs are fully protected from accidental connection of power-line voltages up to 240VAC. The module has a 3dB bandwidth of 100Hz. Signal filtering is accomplished with a six-pole filter, with two poles on the field side of the isolation barrier, and the other four on the computer side.

FEATURES


- Isolated +20VDC Current Loop Supply
- Provides Isolation for Non-isolated 2-wire Transmitters
- High-level Voltage Output +1V to +5V or +2V to +10V
- 1500Vrms Transformer Isolation
- ANSI/IEEE C37.90.1 Transient Protection
- Input Protected to 240VAC, Continuous
- 100dB CMR
- 100Hz Signal Bandwidth
- ±0.03% Accuracy
- ±0.005% Linearity
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863
- Mix and Match SCM5B Types on Backpanel

BENEFITS

- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Reduces EMC Concerns and Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Signal Filtering in Noisy Environments
- Simplifies Sensor Interface and Signal Conditioning Design
- Provides Isolation of External Sensors
- Breaks Ground Loops

APPLICATIONS

- Analog Signal Conditioning
- Analog Signal Isolation
- Analog Signal Filtering
- Industrial Process Control
- Test and Measurement
- System and Signal Monitoring

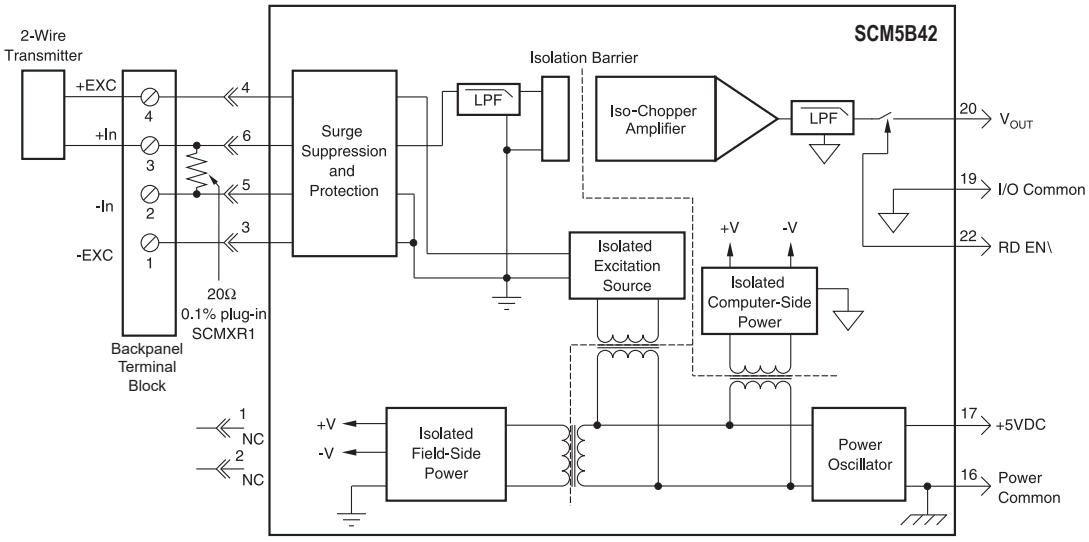

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

SCM5B42 Block Diagram - For Module Dimensions and Pinouts, See Page 1-44

©1984-2024 Dataforth Corporation, All Rights Reserved ISO9001:2015-Registered QMS

Specifications

Typical* at T_A = +25°C and +5VDC Power

Module	SCM5B42
Input Range	4-20mA
Input Resistor	
Value	20.00Ω
Accuracy	±0.1%
Stability	±10ppm/°C
Loop Supply Voltage	Nominal 20V at 4-20mA
Isolated Excitation Protection	
Continuous	240Vrms (max)
Transient	ANSI/IEEE C37.90.1
Input Protection	
Continuous	240Vrms (max)
Transient	ANSI/IEEE C37.90.1
CMV, Input to Output	
Continuous	1500Vrms (max)
Transient	ANSI/IEEE C37.90.1
CMR (50 or 60Hz)	100dB
NMR (–3dB at 100Hz)	120dB per Decade Above 100Hz
Accuracy(1)	±0.03% Span
Linearity	±0.005% Span
Stability	
Input Offset	±1µV/°C
Output Offset	±40µV/°C
Gain	±25ppm/°C of Reading
Noise	
Input, 0.1 to 10Hz	10nArms
Output, 100kHz	500µVrms
Bandwidth, –3dB	100Hz
Response Time, 90% Span	4ms
Output Range	+1V to +5V or +2V to +10V
Output Resistance	50Ω
Output Protection	Continuous Short-to-Ground
Output Selection Time (to ±1mV of V_{OUT})	6µs at C_{LOAD} = 0 to 2000pF
Output Current Limit	+8mA
Output Enable Control	
Max Logic “0”	+0.8V
Min Logic “1”	+2.4V
Max Logic “1”	+36V
Input Current “0,1”	0.5µA
Power Supply Voltage	+5VDC ±5%
Power Supply Current	180mA at Transmitter Load of 20mA 100mA at Transmitter Load of 4mA
Power Supply Sensitivity	±10µV/% RTI(2)
Mechanical Dimensions (h)x(w)x(d)	2.28” x 2.26” x 0.60” (58mm x 57mm x 15mm)
Environmental	
Operating Temp. Range	–40°C to +85°C
Storage Temp. Range	–40°C to +85°C
Relative Humidity	0 to 95% Noncondensing
Emissions EN61000-6-4	ISM, Group 1
Radiated, Conducted	Class A
Immunity EN61000-6-2	ISM, Group 1
RF	Performance A ±0.5% Span Error
ESD,EFT	Performance B

NOTES:
*Contact factory for maximum values.
(1) Includes linearity, hysteresis and repeatability. Does not include SCMXR1 accuracy.
(2) RTI = Referenced to input.

Ordering Information

Model	Input Range	Output Range
SCM5B42-01	4-20mA	+1V to +5V
SCM5B42-02	4-20mA	+2V to +10V

LRI Distribuída no Brasil pela LRI | vendas@lri.com.br | 51 2129-3000

©1984-2024 Dataforth Corporation, All Rights Reserved ISO9001:2015-Registered QMS